
MULTISCAN++ PK



Datasheet



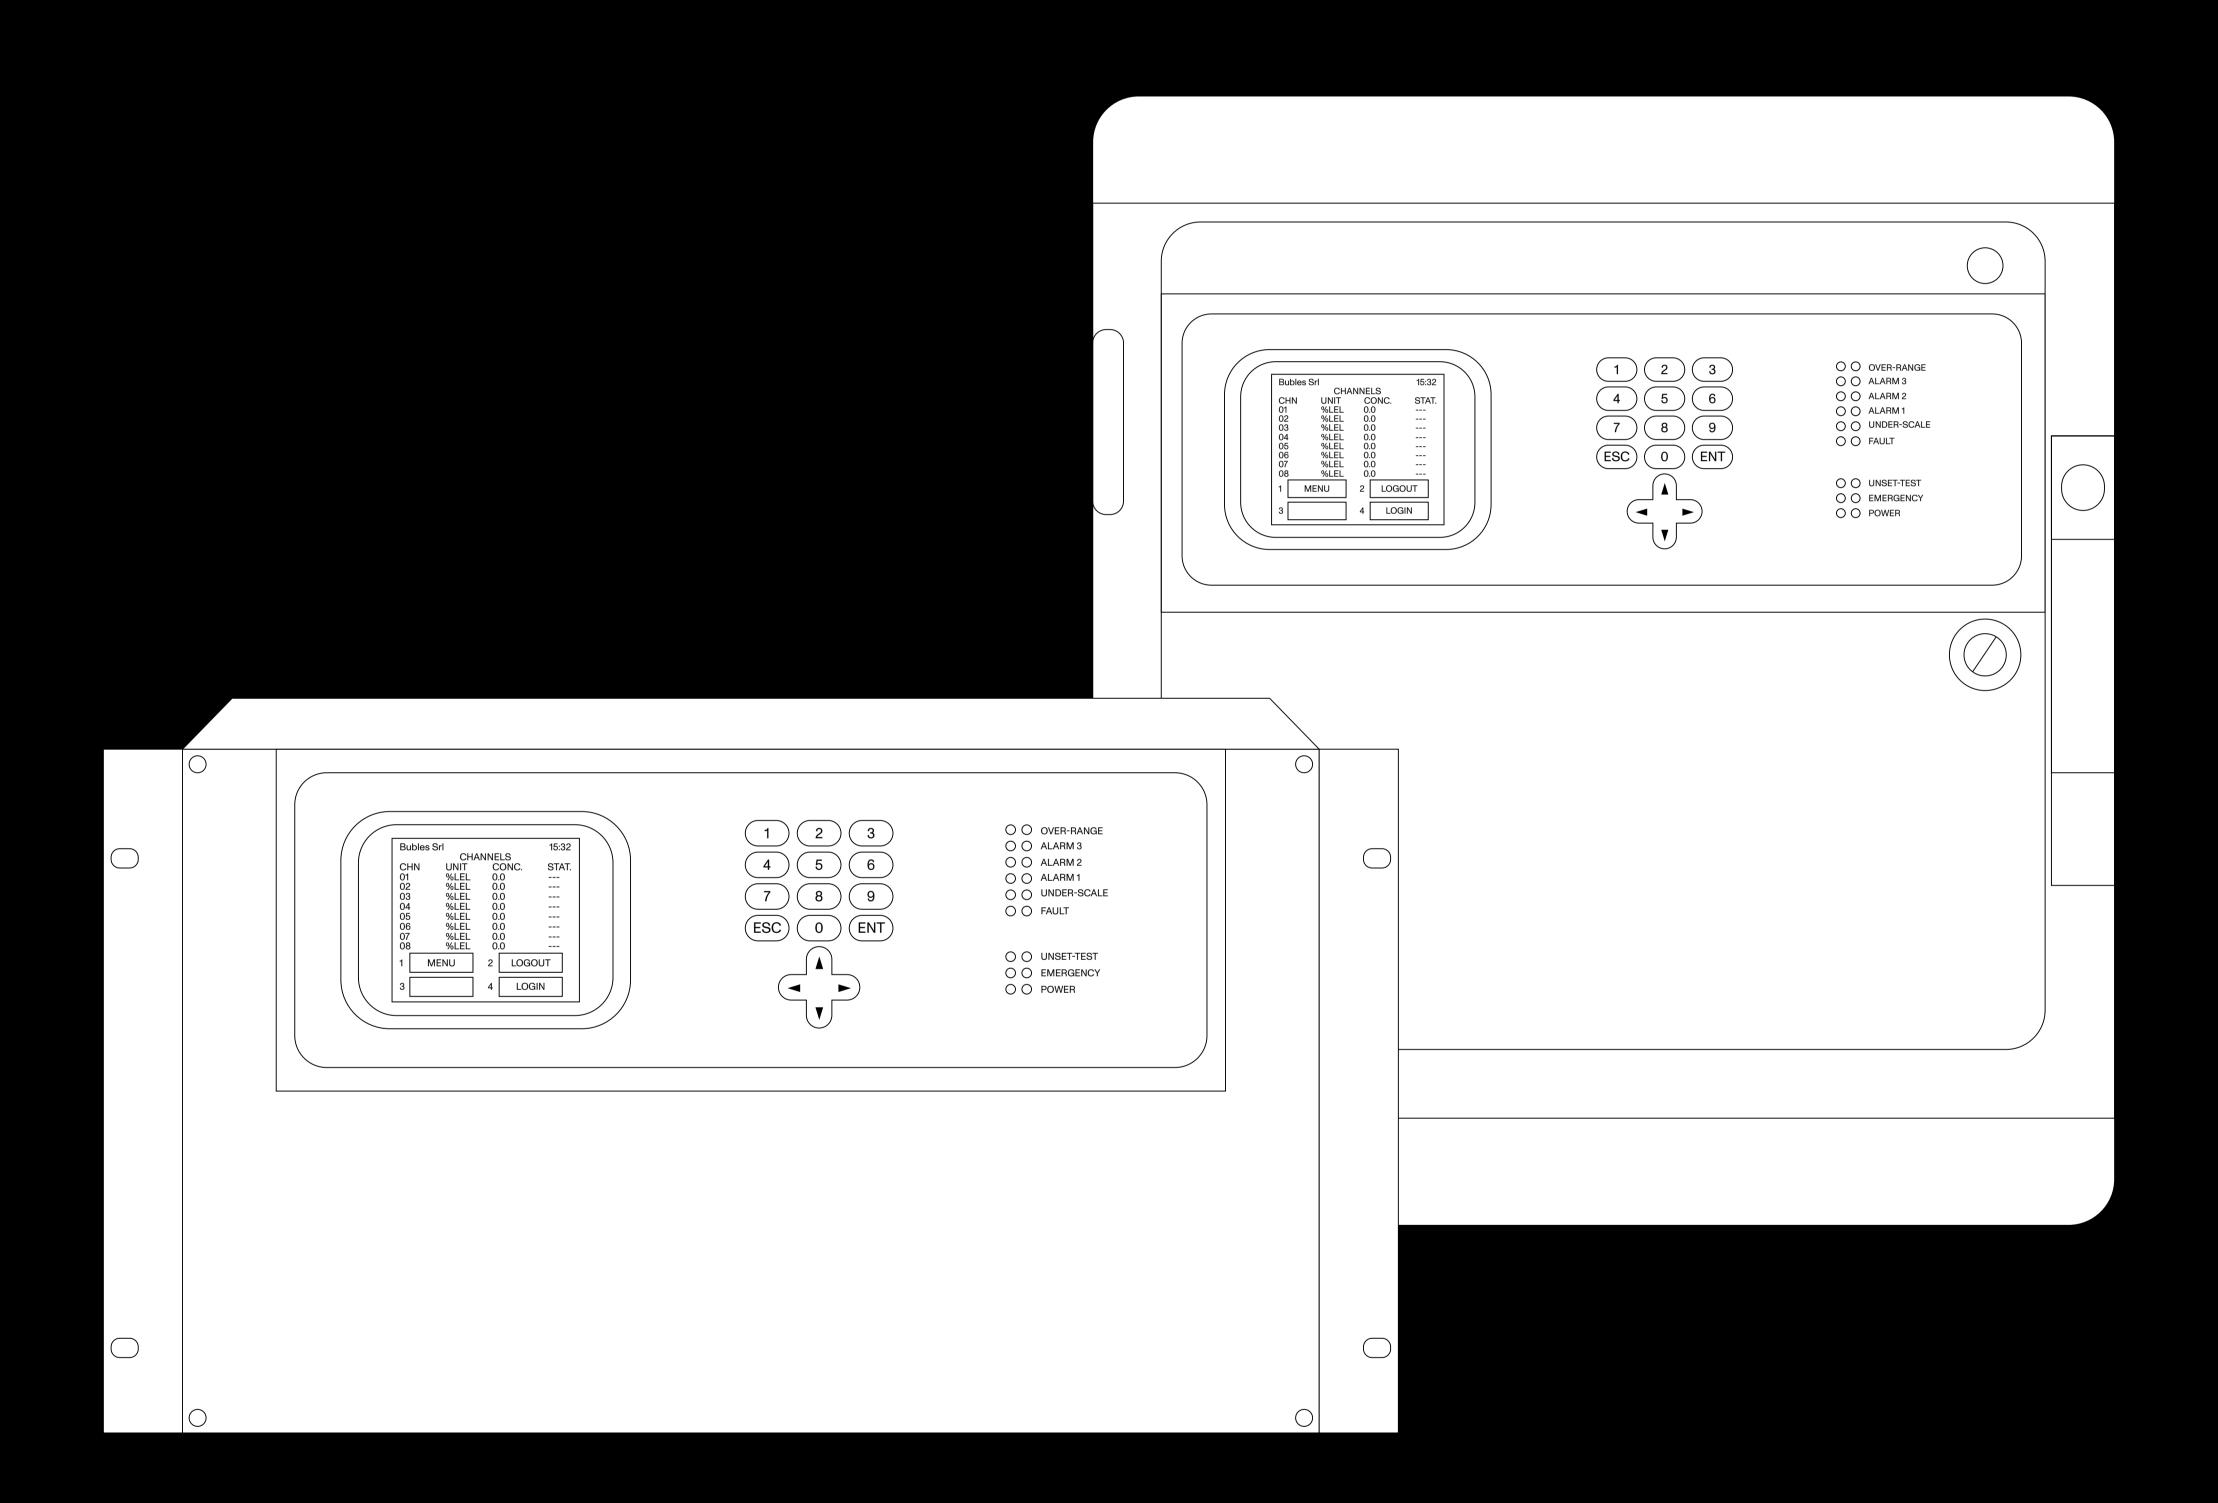

The MULTISCAN++PK is a gas control unit designed to meet the widest range of flexibility required by the market. It is compliant with the EN 50545-1 standard, which defines the requirements for the detection of CO and NO2 in car parks and tunnels.

The control panel is based on a powerful microprocessor which provides a wide range of self-diagnostic procedures to detect and locate possible faults. It can manage up to 32, 64, 128 or 256 gas detectors (according to the four different versions). The detectors can be either of addressable type, directly connected on the buses, or 4-20 mA analogical types connected via 8-input STG/IN8-PK remote modules. The system architecture also provides up to 516 freely programmable Open Collector outputs provided by STG/OUT16S modules, always connected on the RS485 bus. Also 8 relays onboard the panel are included.

The gas panel can be placed in 19" 6U rack, or in a plastic box complete with 27.6 Vdc 4 A power supply.



Functionalities		
Programming	Configuration with Sensitron software	
Operating levels	3, set via password	
Car park application	Alarm activation is programmable as function of the time-weighted average of gas concentration	
Set / Unset detectors	Possibility of unset one or more channels for field maintenance	
Test	Possibility of channels test field	
Supervision	Efficient Modbus protocol for system supervision	
Event log	The event log can be visualised from the gas panel or by the software	
Date and time	Internal clock with backup to keep the date and time even after a shutdown	
Visual indications	LCD display 18 status LEDs	
Acoustic indications	Buzzer 60 dB at 1m	
Front panel buttons	Numbers from 1 to 9, ENT ESC and four directional buttons	



Power supply	Box version: power supply with $V_{ii}=27.6 \text{ Vdc}$ / $I_{ii}=4A$, $V_{ii}=220 \text{ Vac}$
	Possibility to place two 12V 7Ah batteries.
	Rack version: connect to an external 24Vdc power supply
Absorption	200 mA
Available current	3 A for field connections MTS256/128/64: available two auxiliary power supply of 1.1 A each one MTS32: available an auxiliary power supply of 1.1A
Input modules	STG/IN4-OUT4-PK: 4 inputs 4-20mA STG/IN8-PK: 8 inputs 4-20 mA
Output modules	STG/IN4-OUT4-PK: 4 relays outputs STG/OUT16S: 16 Open Collector outputs, convertible into relays with the STG/8REL module
Inputs	8 inputs 4-20 mA on board, additional inputs available via the remote modules. Sensitron gas detectors can be also connected directly on RS485 bus. The total inputs number depends on the gas panel model: Multiscan++ 256: up to 256 inputs Multiscan++ 128: up to 128 inputs Multiscan++ 64: up to 64 inputs Multiscan++ 32: up to 32 inputs
Outputs	8 relays on board Additional outputs available via the remote modules, the total outputs number depends on the gas panel model: Multiscan++ 256: up to 516 outputs Multiscan++ 128: up to 256 outputs Multiscan++ 64: up to 128 outputs Multiscan++ 32: up to 64 outputs
Relays contact ratings	10A a 250 Vac main board, 16A 250 Vac IN4-OUT4 and 8REL modules
RS485 ports	Multiscan++ 256/128: 4 RS485 ports Multiscan++ 64: 2 RS485 ports expandable to 4 Multiscan++ 32: 2 RS485 ports
Serial ports	1 x RS232 for programming, supervision and firmware updating 1 x printing parallel port (only Multiscan++ 256/128/64)
Communication protocol	Galileo or Modbus for field communication Modbus for the supervision



Environmental conditions	
Storage temperature	-20 / +60°C
Operating temperature	0 / +50°C
Operating humidity	15 / 85% RH non condensing

DS5047

MULTISCAN++ PK

Box	
Material	ABS or aluminium rack
Dimensions	Plastic box 470x426x148 mm r rack 19" 6 units
Weight	Rack version: 4.5 kg Box version: 6.6 kg (without batteries)
Cable entry	Box version: 4 preformed holes
Wall fixing	Box version: supplied with 4 mounting brackets

Compliance	
EMC	EN 50270:2015
SIL	EN 50271:2018
Car park standard	EN 50545-1:2011+A1:2016


	_
	${\mathcal T}$
1	/


Product codes	
STMTS/PK-256B	256 Analog 4-20 mA gas detectors connected through remote 8-input modules or addressable gas detectors daisy chained to the RS485 control panel's loops and 8 x 4-20 mA inputs on-board the panel. 8 relay outputs and up to 512 O/C or relay outputs via remote modules.
STMTS/PK-256	Rack version of STMTS/PK-256B
STMTS/PK-128B	128 Analog 4-20 mA gas detectors connected through remote 8-input modules or addressable gas detectors daisy chained to the RS485 control panel's loops and 8 x 4-20 mA inputs on-board the panel. 8 relay outputs and up to 256 O/C or relay outputs via remote modules.
STMTS/PK-128	Rack version of STMTS/PK-128B
STMTS/PK-64B	64 Analog 4-20 mA gas detectors connected through remote 8-input modules or addressable gas detectors daisy chained to the RS485 control panel's loops and 8 x 4-20 mA inputs on-board the panel. 8 relay outputs and up to 128 O/C or relay outputs via remote modules.
STMTS/PK-64	Rack version of STMTS/PK-64B
STMTS/PK-32B	32 Analog 4-20 mA gas detectors connected through remote 8-input modules or addressable gas detectors daisy chained to the RS485 control panel's loops and 8 x 4-20 mA inputs on-board the panel. 8 relay outputs and up to 64 O/C or relay outputs via remote modules.
STMTS/PK-32	Rack version of STMTS/PK-32B
STG/MTSPK-CONF	Windows PC software for MULTISCAN++PK control panel programming.
STG/IN4-OUT4-PK	Remote module with 4 inputs 4-20mA and 4 output relays
STG/IN8-PK	High safety 8-input remote module
STG/OUT16S	High safety 16-output remote module
STG/8REL	Plug and play relay board to be connected to STG/OUT16 to provide 8 relay outputs
STG/SER++	Additional Serial board to implement serial lines in MULTISCAN++PK
STG/TCPIP-C	TCP/IP interface for LAN connection
AL11/276V5	Metal Cabinet with enclosed a 27 Vdc 5A Power Supply
STG/BOX	IP55 Plastic box to house STG/IN8-S or STG/OUT16-S card
STG/32-85	RS232/RS485 Interface for PC connection on RS485 line




Mechanical drawings


Box version

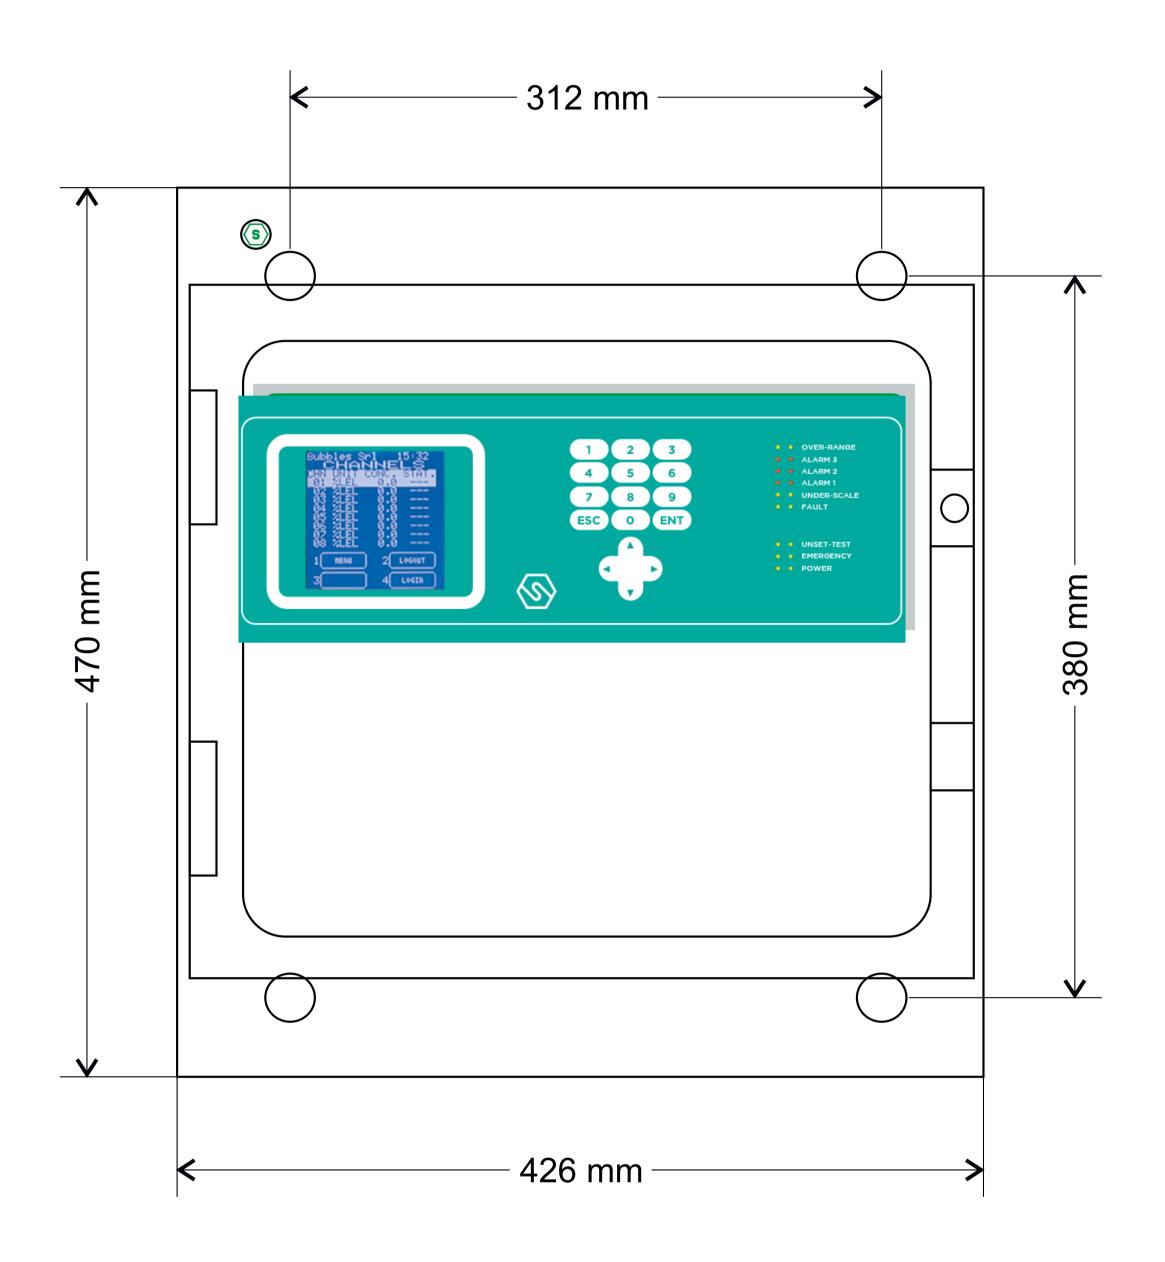

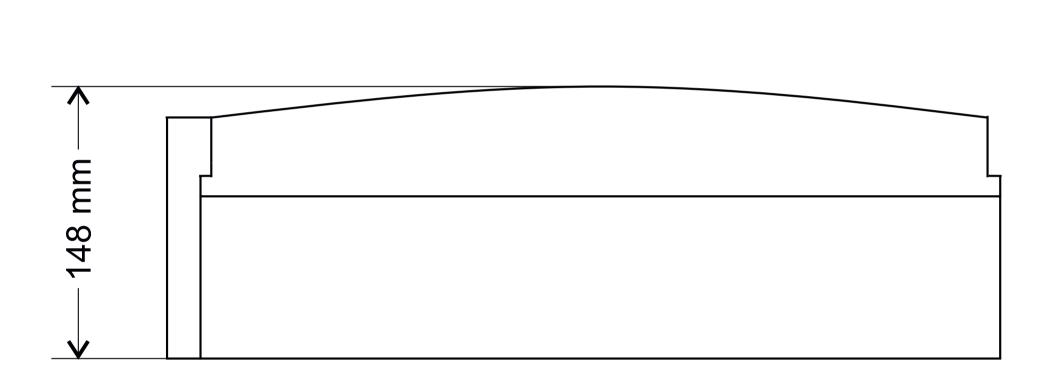

Rack version

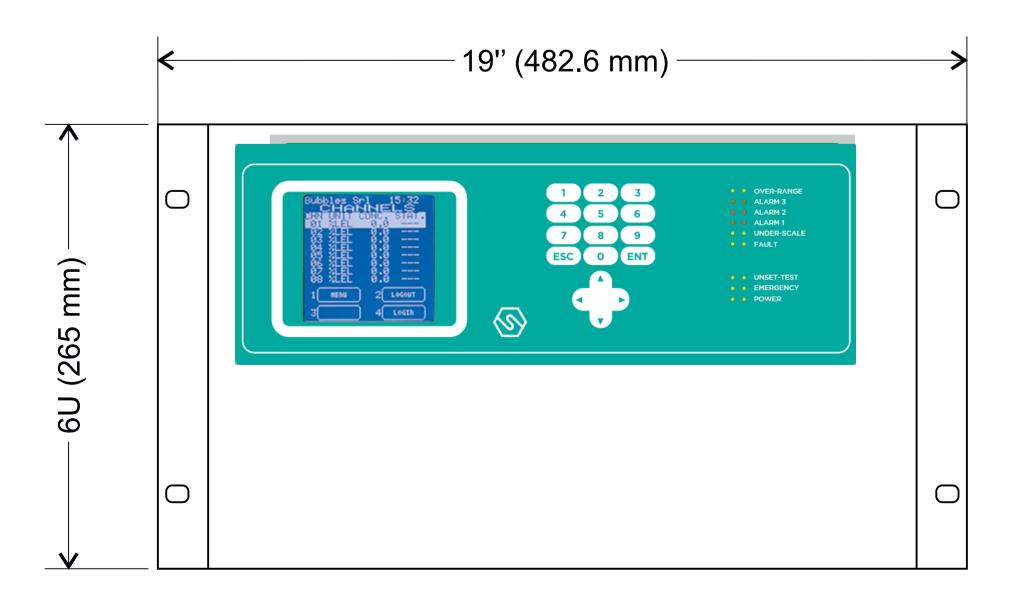

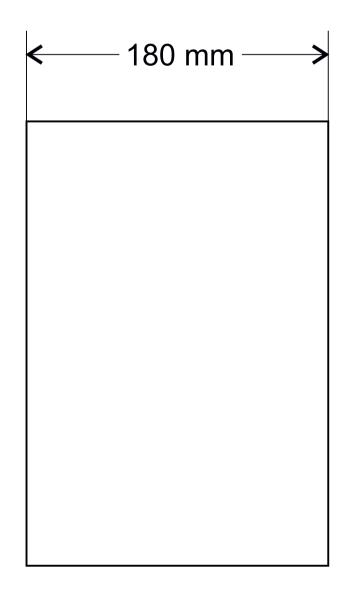

Contatti/Contacts

Viale della Repubblica, 48 2007 Cornaredo (MI) – ITALY

+39 0293548155 sales@sensitron.it sensitron.it

Sensitron S.r.I.

